



Model: **L6G**
Platform Cell




Features

- Capacities: 50kg ~ 600kg
- High accuracy
- Aluminum parallel beam construction
- Max. platform size: 600 × 600
- Integral installation
- With OIML approval: (PTB: D09-03.22)




Specifications



Capacity	kg	50 / 100 / 150 / 200 / 250 / 300 / 500 / 600		
Output Sensitivity	mv/v	2.0 ± 0.2		
Accuracy Class		C3D	C3	C3G
Max. Number of Verification Intervals		2500	3000	4000
Minimum Loadcell Verification Interval	g	E _{max} /5000	E _{max} /7000	E _{max} /11000
Temperature Effect on Zero	%FS/10°C	≤ ± 0.0280	≤ ± 0.0200	≤ ± 0.0127
Temperature Effect on Sensitivity	%FS/10°C	≤ ± 0.0210	≤ ± 0.0175	≤ ± 0.0131
Combined Error	%FS	≤ ± 0.0300	≤ ± 0.0200	≤ ± 0.0150
Creep	%FS	≤ ± 0.0200	≤ ± 0.0167	≤ ± 0.0125
Input Resistance	Ω	406 ± 6 / 1065 ± 15		
Output Resistance	Ω	350 ± 3 / 1000 ± 5		
Insulation Resistance	MΩ	≥ 5000		
Zero Balance	%FS	2		
Temperature, Compensated	°C	-10 ~ +40		
Temperature, Operating	°C	-20 ~ +50		
Excitation, Recommended	v	5 ~ 15		
Safe Overload	%FS	150		
Ultimate Overload	%FS	300		


Dimension

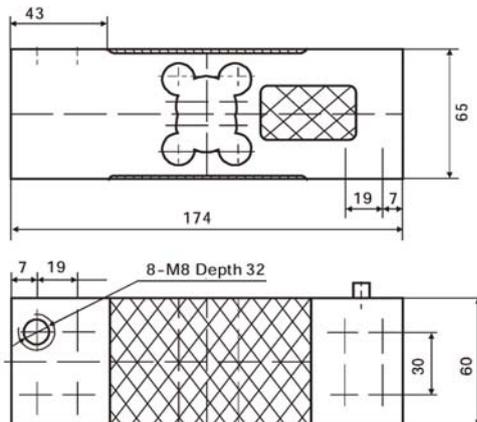

Note: Dimensions in millimeters

Wiring:

Cable length: 3.0 ± 0.1 m.
Cable diameter: 6.0 ± 0.2 mm.

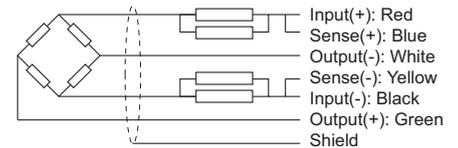

گروه مهندسين
عمران و صنايع ايران
(شرکت سهامی خاص)



WWW.OSIMA.IR

تلفن: ۸۸۷۸۱۱۹۷ - ۸۸۷۸۱۱۴۱